


Jednoškarasti hidraulični podizni stolovi GUTMAN serija HW

Nosivost 1, 2 i 4T



- podizni stolovi za industrijsku uporabu i optimizaciju proizvodnih procesa
- upravljanje pomoću tipkala 24V
- napajanje 380V 50Hz
- sigurnosni ventil protiv preopterećenja
- zaštita od nekontroliranog spuštanja pomoću rubnih kontakata
- kontrolni ventil za zaustavljanje spuštanja stola u slučaju puknuća crijeva
- jednostavna montaža pomoću okastih vijaka
- CE oznaka, norma EN 1570-1

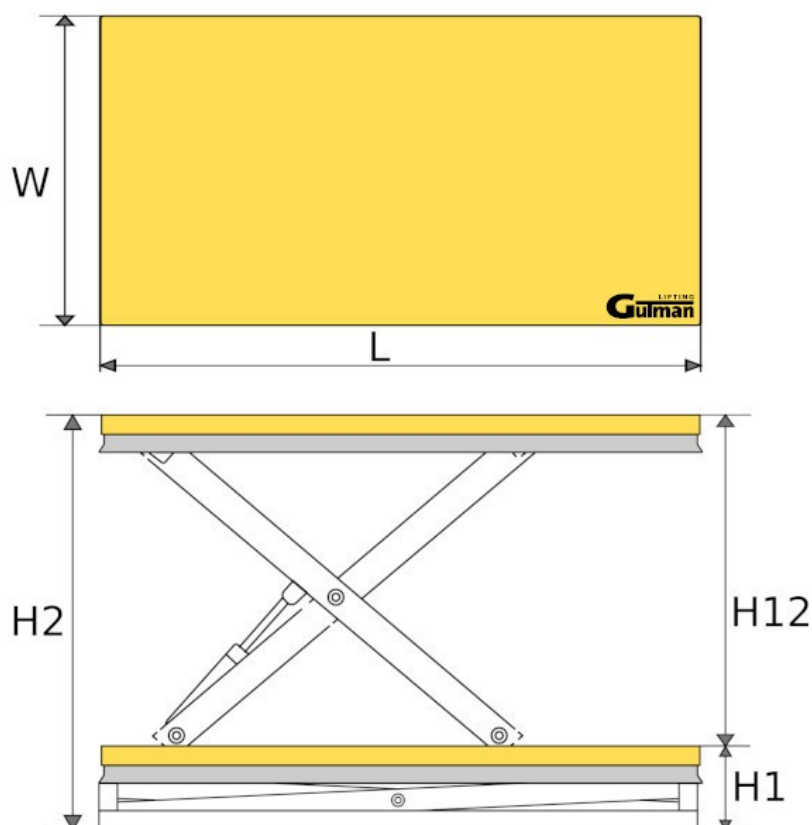

Model	Nosivost	Spušteno H1	Podignuto H2	Hod H12	Radna ploča LxW	Podizanje	Težina
	kg	mm	mm	mm	mm	s	kg
HW 1001	1000	205	990	785	1300x820	20-25	160
HW 1002	1000	205	990	785	1600x1000	20-25	186
HW 1003	1000	240	1300	1060	1700x850	30-35	200
HW 1004	1000	240	1300	1060	1700x1000	30-35	210
HW 1005	1000	240	1300	1060	2000x850	30-35	212
HW 1006	1000	240	1300	1060	2000x1000	30-35	223
HW 1007	1000	240	1300	1060	1700x1500	30-40	365
HW 1008	1000	240	1300	1060	2000x1700	30-40	430
HW 2001	2000	230	1000	770	1300x850	20-25	235
HW 2002	2000	230	1000	770	1600x1000	20-25	268
HW 2003	2000	250	1300	1050	1700x850	25-35	289
HW 2004	2000	250	1300	1050	1700x1000	25-35	300
HW 2005	2000	250	1300	1050	2000x850	25-35	300
HW 2006	2000	250	1300	1050	2000x1000	25-35	315
HW 2007	2000	250	1400	1150	1700x1500	25-35	415
HW 2008	2000	250	1400	1150	2000x1800	25-35	500
HW 4001	4000	240	1050	810	1700x1200	30-40	375
HW 4002	4000	240	1050	810	2000x1200	30-40	405
HW 4003	4000	300	1400	1100	2000x1000	45-50	470
HW 4004	4000	300	1400	1100	2000x1200	45-50	490
HW 4005	4000	300	1400	1100	2200x1000	45-50	480
HW 4006	4000	300	1400	1100	2200x1200	45-50	505
HW 4007	4000	350	1300	950	1700x1500	35-45	570
HW 4008	4000	350	1300	950	2200x1800	35-45	655

Napon 400V, broj obrtaja motora 1400 r/min. Klasa zaštite IP.54, klasa izolacije F